

Rolled thread T-slot bolts DIN 787

Item description/product images



Description

Material:


Tempered steel.

Surface finish:

Forged, milled guide slot, rolled thread.


Class 10.9 heat-treated for M6-M12, black.

Class 8.8 heat-treated for M14-M36, black.

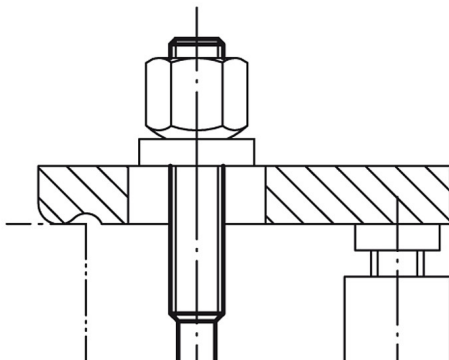

Rolled thread T-slot bolts DIN 787

Drawings

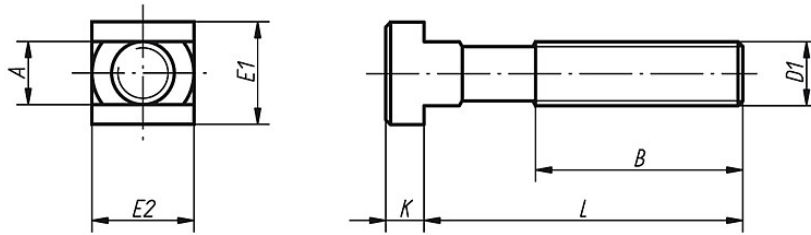

Rolled thread T-slot bolts DIN 787

Overview of items

Rolled thread T-slot bolts DIN 787

Order No.	Nominal size of slot	D1	L	A	B	E1/E2	K	Approx. weight g
K0698.0625	6	M6	25	5,7	15	10	4	9
K0698.0640	6	M6	40	5,7	28	10	4	12
K0698.0663	6	M6	63	5,7	40	10	4	18
K0698.0832	8	M8	32	7,7	22	13	6	20
K0698.0850	8	M8	50	7,7	35	13	6	25
K0698.0880	8	M8	80	7,7	50	13	6	30
K0698.1040	10	M10	40	9,7	30	15	6	30
K0698.1063	10	M10	63	9,7	45	15	6	50
K0698.10100	10	M10	100	9,7	60	15	6	70
K0698.1250	12	M12	50	11,7	35	18	7	60
K0698.1263	12	M12	63	11,7	40	18	7	65
K0698.1280	12	M12	80	11,7	55	18	7	75
K0698.12100	12	M12	100	11,7	65	18	7	90
K0698.12125	12	M12	125	11,7	75	18	7	110
K0698.12160	12	M12	160	11,7	100	18	7	135
K0698.12200	12	M12	200	11,7	120	18	7	160
K0698.1450	14	M12	50	13,7	35	22	8	70
K0698.1463	14	M12	63	13,7	45	22	8	80
K0698.1480	14	M12	80	13,7	55	22	8	100
K0698.14100	14	M12	100	13,7	65	22	8	110
K0698.14125	14	M12	125	13,7	75	22	8	120
K0698.14160	14	M12	160	13,7	100	22	8	150
K0698.14200	14	M12	200	13,7	120	22	8	180
K0698.16631	16	M14	63	15,7	45	25	9	115
K0698.16801	16	M14	80	15,7	55	25	9	130
K0698.161001	16	M14	100	15,7	65	25	9	150
K0698.161251	16	M14	125	15,7	75	25	9	180
K0698.161601	16	M14	160	15,7	100	25	9	220
K0698.162501	16	M14	250	15,7	150	25	9	300
K0698.1663	16	M16	63	15,7	45	25	9	140
K0698.1680	16	M16	80	15,7	55	25	9	160
K0698.16100	16	M16	100	15,7	65	25	9	180
K0698.16125	16	M16	125	15,7	85	25	9	225
K0698.16160	16	M16	160	15,7	100	25	9	260
K0698.16200	16	M16	200	15,7	125	25	9	315
K0698.16250	16	M16	250	15,7	150	25	9	380
K0698.1863	18	M16	63	17,7	45	28	10	160
K0698.1880	18	M16	80	17,7	55	28	10	185
K0698.18100	18	M16	100	17,7	65	28	10	203
K0698.18125	18	M16	125	17,7	85	28	10	245
K0698.18160	18	M16	160	17,7	100	28	10	280
K0698.18200	18	M16	200	17,7	125	28	10	330
K0698.18250	18	M16	250	17,7	150	28	10	430
K0698.2080	20	M20	80	19,7	55	32	12	290
K0698.20100	20	M20	100	19,7	65	32	12	340
K0698.20125	20	M20	125	19,7	85	32	12	390
K0698.20160	20	M20	160	19,7	110	32	12	470
K0698.20200	20	M20	200	19,7	125	32	12	550
K0698.20250	20	M20	250	19,7	150	32	12	670
K0698.20315	20	M20	315	19,7	190	32	12	800
K0698.2280	22	M20	80	21,7	55	35	14	330
K0698.22100	22	M20	100	21,7	65	35	14	400
K0698.22125	22	M20	125	21,7	85	35	14	428
K0698.22160	22	M20	160	21,7	110	35	14	500
K0698.22200	22	M20	200	21,7	125	35	14	570
K0698.22250	22	M20	250	21,7	150	35	14	680
K0698.22315	22	M20	315	21,7	190	35	14	820
K0698.24100	24	M24	100	23,7	70	40	16	540
K0698.24125	24	M24	125	23,7	85	40	16	640
K0698.24160	24	M24	160	23,7	110	40	16	770
K0698.24200	24	M24	200	23,7	125	40	16	900
K0698.24250	24	M24	250	23,7	150	40	16	1040
K0698.24315	24	M24	315	23,7	190	40	16	1270
K0698.26100	24	M24	400	23,7	240	40	16	1700
K0698.28100	28	M24	100	27,7	70	44	18	650

