

Hexagon screw plugs

Item description/product images



Description

Material:

Thermoplastic polyamide 66

Surface finish:

Black, flat packing asbestos-free



Note:

Temperature resistant with oil up to 100 °C, with water up to 70 °C.


Drawings

Form A
with fill symbol

Form B
with fill symbol and
ventilation hole

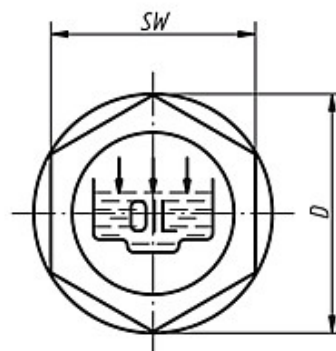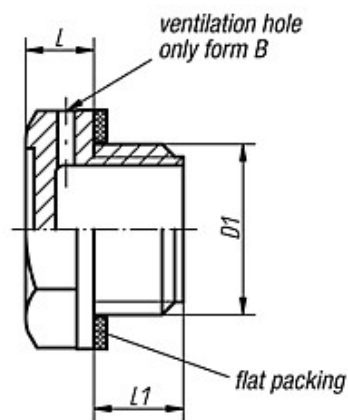

Form C
with drain symbol



Overview of items

Order No. Form A	Order No. Form B	Order No. Form C	D	D1	L	L1	SW	Tightening torque max. Nm	Approx. weight kg
K0454.119014	K0454.219014	K0454.319014	19,5	G 1/4	7	9	17	5	0,002
K0454.122038	K0454.222038	K0454.322038	22	G 3/8	7,5	10	18	8	0,004
K0454.128012	K0454.228012	K0454.328012	28	G 1/2	7,5	11	24	9	0,006
K0454.134034	K0454.234034	K0454.334034	34	G 3/4	9	11	30	11	0,008
K0454.142100	K0454.242100	K0454.342100	42	G 1	10,5	12	35	-	0,018
K0454.151114	K0454.251114	K0454.351114	51	G 1 1/4	12	13,5	42	-	0,026
K0454.158112	K0454.258112	K0454.358112	58	G 1 1/2	10	14,5	50	-	0,030
K0454.174200	K0454.274200	K0454.374200	74	G 2	13,5	16	64	-	0,054
K0454.1191415	K0454.2191415	K0454.3191415	19,5	M14x1,5	7	9	17	5	0,002
K0454.1211615	K0454.2211615	K0454.3211615	21	M16x1,5	7,5	10	18	6	0,004
K0454.1261815	K0454.2261815	K0454.3261815	26	M18x1,5	7,5	10	21	7	0,004
K0454.1282015	K0454.2282015	K0454.3282015	28	M20x1,5	8	10	24	8	0,006
K0454.1282215	K0454.2282215	K0454.3282215	28	M22x1,5	8	11	24	10	0,006
K0454.1524015	K0454.2524015	K0454.3524015	52	M40x1,5	10	13	42	-	0,024